


Dimensions

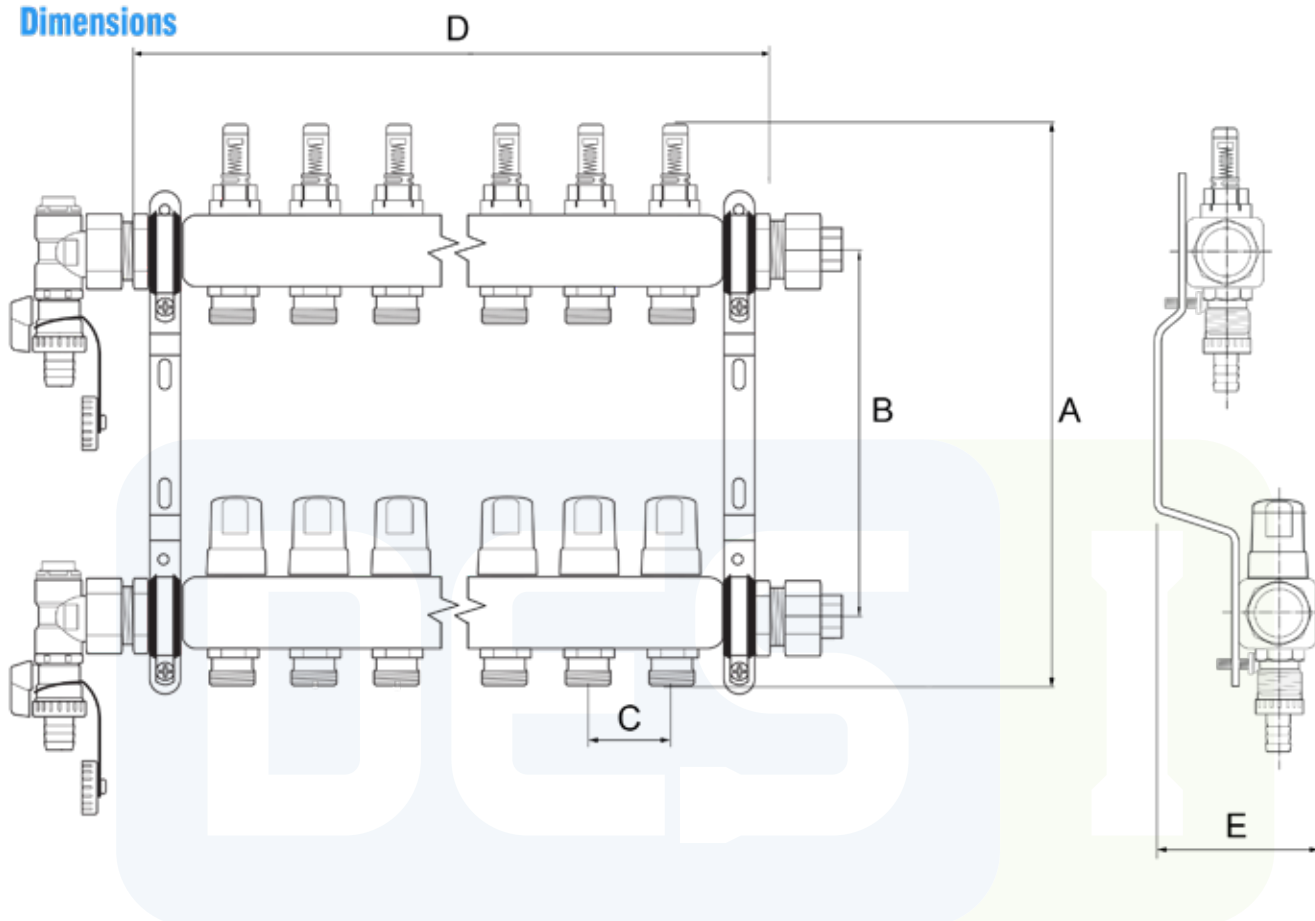

PART CIRCUITS	A	B	C	D	E
MANIFOLD2	320	210	50	133	85
MANIFOLD3	320	210	50	183	85
MANIFOLD4	320	210	50	233	85
MANIFOLD5	320	210	50	293	85
MANIFOLD6	320	210	50	343	85
MANIFOLD7	320	210	50	383	85
MANIFOLD8	320	210	50	433	85
MANIFOLD9	320	210	50	493	85
MANIFOLD10	320	210	50	533	85
MANIFOLD11	320	210	50	583	85
MANIFOLD12	320	210	50	633	85


All dimensions shown in mm

TECHNICAL SPECIFICATION

Overview

Brass manifolds for use on underfloor heating systems. These consist of two manifold bars, one for the flow and one for the return, complete with ball valves, drain/filling valves and air vents.

On the flow bar each port has a Taconova flow indicator, with isolator including an easy-to-read gauge-glass. Each port on the return bar is equipped with an integral control valve and protection cap which allows the user to adjust the volume of water, or can be removed to accept a Manifold Thermoelectric Head.

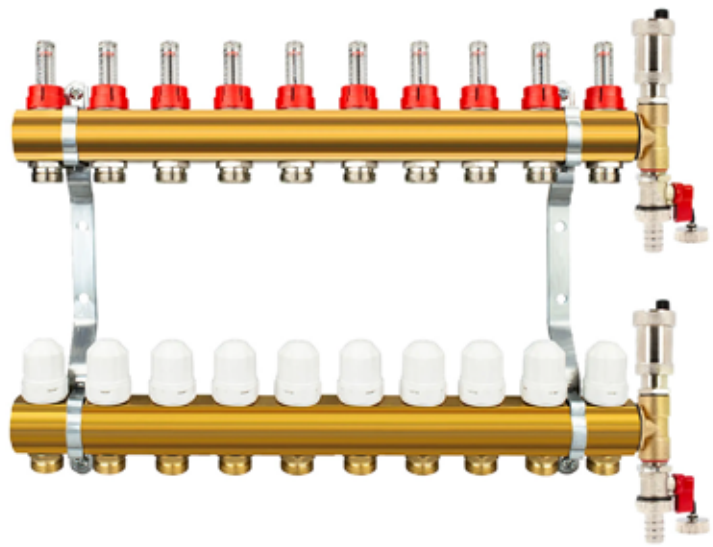

Specifications

Maximum static pressure	10 bar
Maximum temperature	90°C
Connection sizes	1" FBSP

Materials

Manifold body	Brass
---------------	-------

Features and Benefits

- ✓ Supplied pre-mounted on installation brackets
- ✓ Valves on return manifold accept a Manifold Thermoelectric Head for remote control of each zone
- ✓ 1" ball valves, filling and drain-off points are included
- ✓ Connections are Euroconus and a range of fittings are available to suit most UK pipe sizes
- ✓ Taconova flow meters with isolating valves included